

SSR M55-75

ROTARY SCREW AIR COMPRESSORS

MODEL	RATED PRESSURE		NOMINAL MOTOR POWER		CAPACITY		WEIGHT
	bar(g)	psi(g)	kW	hp	m ³ /min	cfm	
ML55	7.5	109	55	75	10.2	360	1375
MM55	8.5	123	55	75	9.2	325	1375
MH55	10	145	55	75	8.5	300	1375
MU55	13	189	55	75	6.5	230	1375
ML75	7.5	109	75	100	12.9	456	1425
MM75	8.5	123	75	100	12.2	431	1425
MH75	10	145	75	100	11.0	388	1425
MU75	13	189	75	100	8.42	297	1425

Aircooled dimensions shown

A - 75 mm dia. Electric Cable Entry


B - 1/8" BSPT Condensate Drain

C - 2" BSPT Air Discharge

D - Cooling Air Exhaust

E - Cooling Air Inlet

F - Control Panel

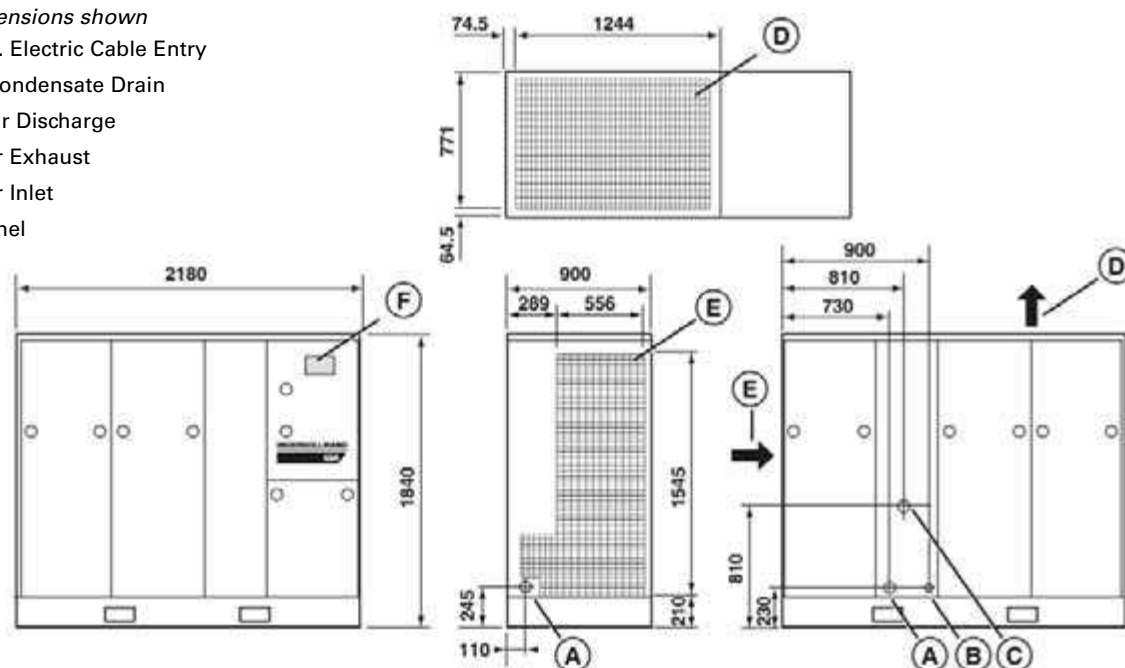

Ingersoll-Rand compressors are not designed, intended or approved for breathing air applications. Ingersoll-Rand does not approve specialised equipment for breathing air applications and assumes no responsibility or liability for compressors used for breathing air service.

Nothing contained on these pages is intended to extend any warranty or representation, expressed or implied, regarding the product described herein. Any such warranties or other terms and conditions of sale of products shall be in accordance with Ingersoll-Rand's standard terms and conditions of sale for such products, which are available upon request.

Product improvement is a continuing goal at Ingersoll-Rand. Designs and specifications are subject to change without notice or obligation.

www.air.irco.com/uk

Industrial Air Solutions

Ingersoll-Rand European Sales Limited
Swan Lane
Hindley Green
Wigan WN2 4EZ, UK
Tel: +44 (0) 1942 257171
Fax: +44 (0) 1942 254162

